
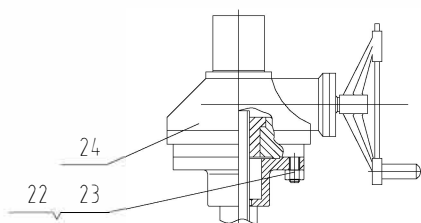


PN10-16 DN25-1200

Gate Valve, Globe Valve, Plug Valve, Check Valve, Butterfly Valve,
Power Station Valve, Oilfield Dedicated Valve, Y-Strainer.

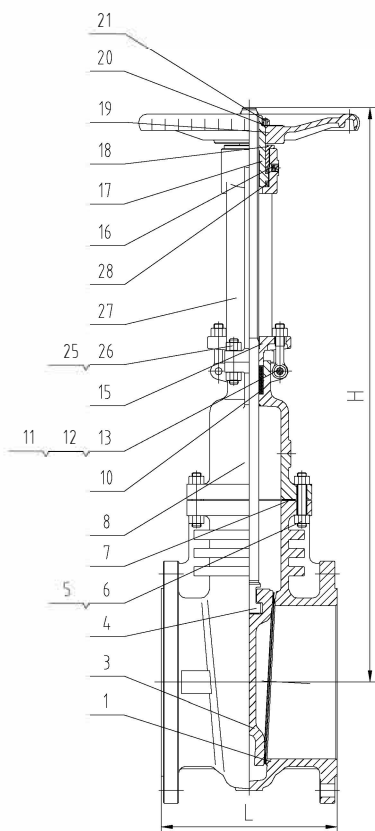

Gear is used for customer's requirement

PN10 16 DN25-1200				
NO	Part Name	GS-C25	CF8	CF8M
1	Body	GS-C25+13Cr	A351 CF8	A351 CF8M
2	Seat	-	-	-
3	Disc	GS-C25+13Cr	A351 CF8	A351 CF8M
4	Stern	A182 F6a	A182 F304	A182 F316
5	Bolt	A193 B7	A320 B8	A320 B8
6	Nut	A194 2H	A194 8	A194 8
7	Gasket	SS+Flexible Graphite	SS+Flexible Graphite	SS+Flexible Graphite
8	Bonnet	GS-C25	A351 CF8	A351 CF8M
9	Backseat	-	-	-
10	Packing	Flexible Graphite	Flexible Graphite	Flexible Graphite
11	Pin	Carbon Steel	Stainless Steel	Stainless Steel
12	Gland Eyebolt	A193 B7	A320 B8	A320 B8
13	Nut	A194 2H	A194 8	A194 8
14	Gland	-	-	-
15	Gland Flange	GS-C25	A351 CF8	A351 CF8M
16	Nozzle	Bronze	Bronze	Bronze
17	Stern Nut	A439 D2	A439 D2	A439 D2
18	Retaining Nut	Carbon Steel	Carbon Steel	Carbon Steel
19	HandWheel	A47	A47	A47
20	Lock Nut	Carbon Steel	Carbon Steel	Carbon Steel
21	Grub screw	Carbon Steel	Carbon Steel	Carbon Steel
22	Bolt	A193 B7	A320 B8	A320 B8
23	Nut	A194 2H	A194 8	A194 8
24	Gear		Component	
25	Bolt	A193 B7	A320 B8	A320 B8
26	Nut	A194 2H	A194 8	A194 8
27	Yoke	GS-C25	A351 CF8	A351 CF8M
28	Bearing		Component	

MAIN PARAMETER SPECIFICATION
Design and manufacture: BS EN1984
Face to face: EN 558-14
Flange end: EN 1092
Pressure and temperature class; ASME B16.34
Pressure test: EN 12266

PN10 16 DN25 1200													
PN	DN	250	300	350	400	450	500	600	700	800	900	1000	1200
10	L	250	270	290	310	330	350	390	430	470	510	550	630
	H	1150	1380	1550	1745	1930	2120	2520	3050	3280	3720	4200	5000
	W	400	450	500	550	600	600	700	Manual gear operator is recommended				
16	L	250	270	290	310	330	350	390	430	470	510	550	630
	H	1150	1380	1550	1745	1930	2120	2520	3050	3280	3720	4200	5000
	W	400	450	500	550	600	600	700	Manual gear operator is recommended				